

▼ HA5 Series Pneumatic Hydraulic Pumps



HA5 Pneumatic hydraulic pumps

Motor size: 1.5KW

Maximum output pressure: 70MPa

Low pressure flow: 7L/Min

High pressure flow: 1L/Min



Reservoirs capacity: 7/20L

- Configuration of air source processing trios
- Motor start ball valve switch, easy to start and stop operation
- Optional single action, double action manual reversing valve
- Built-in safety valve, external adjustable relief valve
- Steel fuel tank, full protection frame

▼ HA5 Series Type Specification Sheet:


Model Number	Maximum air consumption	Reservoirs capacity	Low Pressure Flow	High Pressure Flow	Number of oil outlet	Weight Without Oil
HA5007MV43	220M ³ /H	7L	7L/Min	1L/Min	2	36KG
HA5020MV43	220M ³ /H	20L	7L/Min	1L/Min	2	48KG

▼ HA5 Product Illustration:

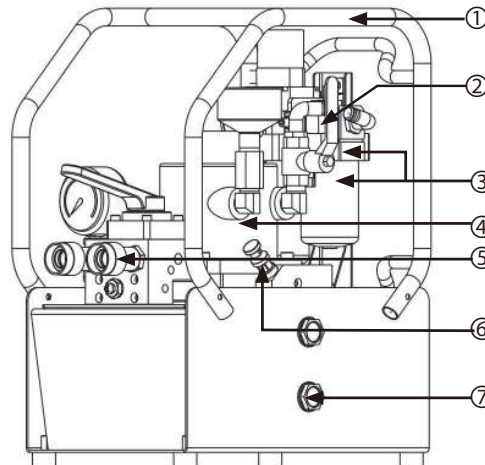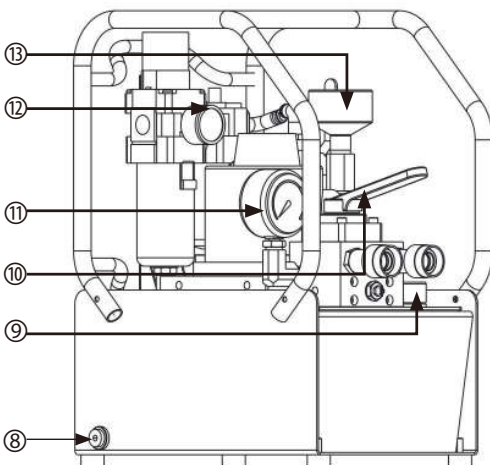


NO	Name
1	Protected Framework
2	Ball valve switch
3	triplet
4	Motor size
5	Couplers
6	Relief Valve
7	Sight Glass
8	Oil Drain
9	Refueling And Exhaust Outlet
10	Manual Directional Valve
11	Gauge
12	Barometer
13	Suppressor

▼ HA5 Outline Dimensional Drawing:

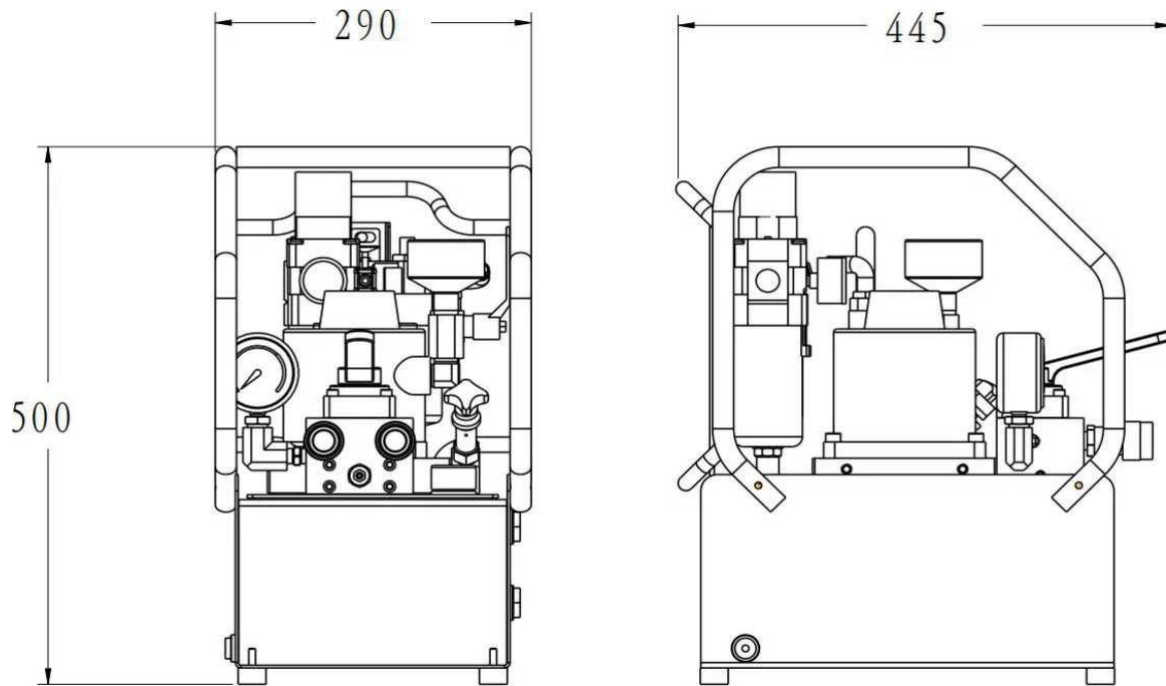

▼ HA5 Hydraulic Schematic Diagram:

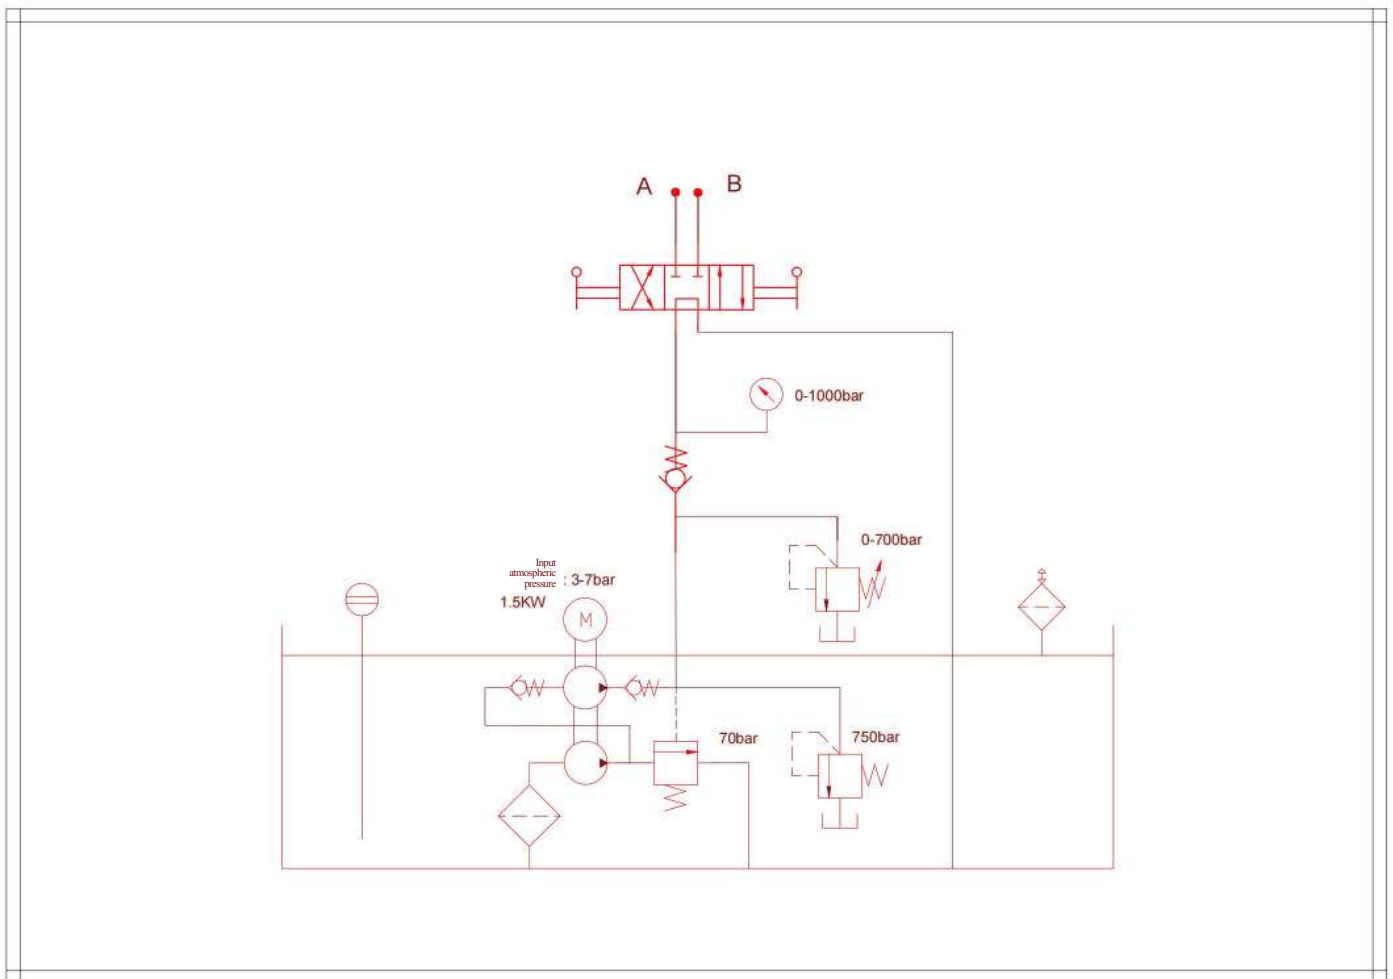

▼ HA5 Pressure Flow Diagram:

