


▼HSL Single-Acting High Tonnage Lock Nut Cylinders



- Single-acting, spring-return hydraulic cylinder
- Equipped with a spherical saddle, which effectively enhances the cylinder's anti-eccentric load capacity
- The locking nut enables mechanical locking for load retention
- The low-friction locking nut is easy to rotate, saving time and effort
- Can withstand up to 10% eccentric load when at 90% of the maximum stroke
- NAC surface treatment (adopting gas nitriding and post-oxidation processes) provides superior corrosion resistance and anti-eccentric load performance
- The overflow port acts as a stroke limiter to prevent plunger overstroke
- High-grade polyurethane seals are adopted, featuring excellent sealing performance, wear resistance, and a long service life
- Equipped with certified G80 high-strength lifting eyes and base mounting holes

▼ HSL Performance Introduction:

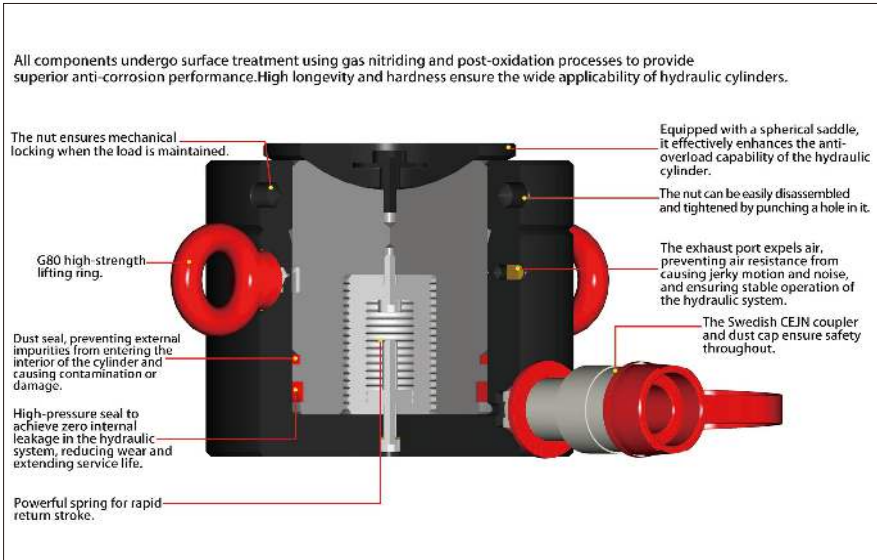


Rated Pressure: 70MPa


Rated Tonnage: 30 -500ton

Stroke Range: 50-300mm

▼ HSL Outline Dimensional Drawing

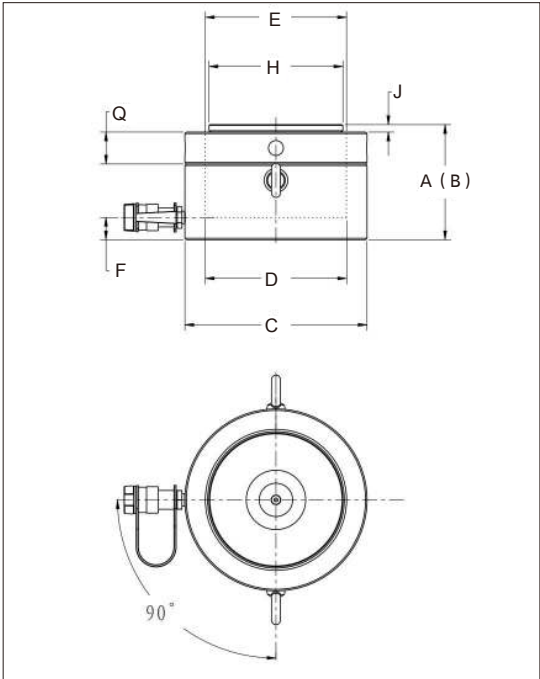

HSL30-HSL160

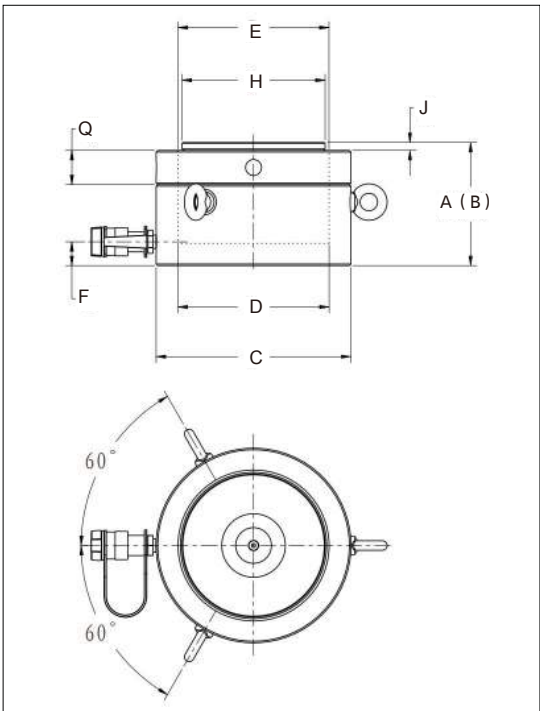

HSL200-HSL500

▼ HSL Type Specification Sheet:

Load Capacity (ton)	Model Number	Stroke (mm)	Body Height A (mm)	Extended Height B (mm)	Outer Diameter C (mm)	Cylinder Bore D (mm)	Plunger Diameter E	Oil Inlet Height F	Saddle Diameter H (mm)	Saddle Protrusion J	Max Saddle Tilt Angle	Lock Nut Height Q (mm)	Weight (KG)
30	HSL30-50	50	120	170	110	75	Tr75x4	19	65	5	5°	25	10
	HSL30-100	100	170	270	110	75	Tr75x4	19	65	5	5°	25	14
	HSL30-150	150	225	375	110	75	Tr75x4	19	65	5	5°	25	17
	HSL30-200	200	280	480	110	75	Tr75x4	19	65	5	5°	25	21
	HSL30-250	250	335	585	110	75	Tr75x4	19	65	5	5°	25	25
	HSL30-300	300	390	690	110	75	Tr75x4	19	65	5	5°	25	29
60	HSL60-50	50	126	176	140	105	Tr105x4	19	96	7	5°	28	15
	HSL60-100	100	176	276	140	105	Tr105x4	19	96	7	5°	28	20
	HSL60-150	150	231	381	140	105	Tr105x4	19	96	7	5°	28	27
	HSL60-200	200	286	486	140	105	Tr105x4	19	96	7	5°	28	33
	HSL60-250	250	341	591	140	105	Tr105x4	19	96	7	5°	28	39
	HSL60-300	300	396	696	140	105	Tr105x4	19	96	7	5°	28	46
100	HSL100-50	50	137	187	173	135	Tr135X6	21	126	8	5°	31	25
	HSL100-100	100	187	287	173	135	Tr135X6	21	126	8	5°	31	34
	HSL100-150	150	242	392	173	135	Tr135X6	21	126	8	5°	31	43
	HSL100-200	200	297	497	173	135	Tr135X6	21	126	8	5°	31	53
	HSL100-250	250	352	602	173	135	Tr135X6	21	126	8	5°	31	63
	HSL100-300	300	407	707	173	135	Tr135X6	21	126	8	5°	31	73
160	HSL160-45	45	148	193	220	170	Tr170X6	27	160	9	5°	40	43
	HSL160-100	100	203	303	220	170	Tr170X6	27	160	9	5°	40	58
	HSL160-150	150	258	408	220	170	Tr170X6	27	160	9	5°	40	74
	HSL160-200	200	313	513	220	170	Tr170X6	27	160	9	5°	40	90
	HSL160-250	250	368	618	220	170	Tr170X6	27	160	9	5°	40	106
	HSL160-300	300	423	723	220	170	Tr170X6	27	160	9	5°	40	122
200	HSL200-45	45	155	200	245	190	Tr190X6	30	180	10	5°	43	53
	HSL200-100	100	210	310	245	190	Tr190X6	30	180	10	5°	43	72
	HSL200-150	150	265	415	245	190	Tr190X6	30	180	10	5°	43	90
	HSL200-200	200	320	520	245	190	Tr190X6	30	180	10	5°	43	109
	HSL200-250	250	375	625	245	190	Tr190X6	30	180	10	5°	43	128
	HSL200-300	300	430	730	245	190	Tr190X6	30	180	10	5°	43	147
250	HSL250-45	45	159	204	275	215	Tr215X6	32	200	12	5°	43	68
	HSL250-100	100	214	314	275	215	Tr215X6	32	200	12	5°	43	92
	HSL250-150	150	269	419	275	215	Tr215X6	32	200	12	5°	43	116
	HSL250-200	200	324	524	275	215	Tr215X6	32	200	12	5°	43	141
	HSL250-250	250	379	629	275	215	Tr215X6	32	200	12	5°	43	165
	HSL250-300	300	434	734	275	215	Tr215X6	32	200	12	5°	43	189
300	HSL300-45	45	166	211	305	235	Tr235X6	35	225	12	4°	48	90
	HSL300-100	100	221	321	305	235	Tr235X6	35	225	12	4°	48	120
	HSL300-150	150	276	426	305	235	Tr235X6	35	225	12	4°	48	151
	HSL300-200	200	331	531	305	235	Tr235X6	35	225	12	4°	48	181
	HSL300-250	250	386	636	305	235	Tr235X6	35	225	12	4°	48	211
	HSL300-300	300	441	741	305	235	Tr235X6	35	225	12	4°	48	241
400	HSL400-45	45	178	223	350	270	Tr270X6	40	250	12	4°	55	127
	HSL400-100	100	233	333	350	270	Tr270X6	40	250	12	4°	55	167
	HSL400-150	150	288	438	350	270	Tr270X6	40	250	12	4°	55	207
	HSL400-200	200	343	543	350	270	Tr270X6	40	250	12	4°	55	247
	HSL400-250	250	398	648	350	270	Tr270X6	40	250	12	4°	55	288
	HSL400-300	300	453	753	350	270	Tr270X6	40	250	12	4°	55	328
500	HSL500-45	45	192	237	400	305	Tr305X6	49	290	10	3°	61.5	181
	HSL500-100	100	247	347	400	305	Tr305X6	49	290	10	3°	61.5	234
	HSL500-150	150	302	452	400	305	Tr305X6	49	290	10	3°	61.5	287
	HSL500-200	200	357	557	400	305	Tr305X6	49	290	10	3°	61.5	339
	HSL500-250	250	412	662	400	305	Tr305X6	49	290	10	3°	61.5	392
	HSL500-300	300	467	767	400	305	Tr305X6	49	290	10	3°	61.5	445